


## Hot Oiler Hose

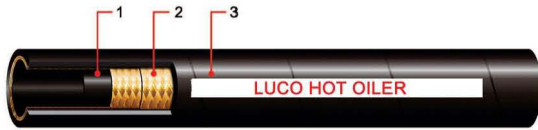

1. Chloroprene Rubber Tube
2. Two High Tensile Steel Wire Braids
3. Chloroprene Rubber Cover

**Tube:** Black chloroprene

**Reinforcement:** Two braids of high tensile steel wire

**Cover:** Black chloroprene, wrapped finish


**Temperature:** -40° F / +275° F, Intermittent use up to 300° F

**Application:** Hot asphalt, glue, tar, oil, wax; in-plant transfer; delivery trucks; construction, general industrial, oil field

**Key Note: High pressure hose for hot oil**

Part Number	Hose I.D.		Hose O.D.		Working Pressure		Burst Pressure		Min. Bend Radius		Weight
	(in)	(in)	(mm)	(MPa)	(psi)	(MPa)	(psi)	(in)	(mm)	(lbs/ft)	
LH-HO-24	1 1/2	1.98	50.4	15.5	2,250	46.5	6,750	13	330	1.59	

## DIN 4SP

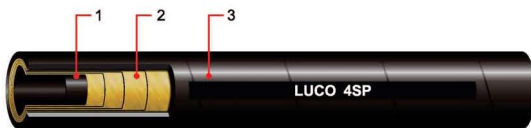

- 1- Synthetic Rubber Tube
- 2- Four High Tensile Steel Wire Spirals
- 3- Synthetic Rubber Cover

**Tube:** Oil resistant, synthetic rubber

**Reinforcement:** Four spirals of high tensile steel wire

**Cover:** Oil and weather resistant synthetic rubber

**Temperature:** -40° F / +212° F, Intermittent use up to 250° F

**Application:** Petroleum based hydraulic fluid, gasoline, water, diesel fuels, lubricating oils, glycol, mineral oils, and more

**Key Note: High impulse cycles**

Part Number	Hose I.D.		Hose O.D.		Working Pressure		Burst Pressure		Min. Bend Radius		Weight
	(in)	(in)	(mm)	(MPa)	(psi)	(MPa)	(psi)	(in)	(mm)	(lbs/ft)	
LH-4SP-06	3/8	0.76	19.2	44.5	6,450	180.0	26,000	7.1	180	0.52	
LH-4SP-08	1/2	0.82	20.8	41.5	6,000	166.0	24,000	9.1	230	0.60	
LH-4SP-10	5/8	0.94	24.0	35.0	5,000	140.0	20,000	9.8	250	0.75	
LH-4SP-12	3/4	1.09	27.6	35.0	5,000	140.0	20,000	11.8	300	1.07	
LH-4SP-16	1	1.25	31.8	28.0	4,000	112.0	16,000	13.4	340	1.36	
LH-4SP-20	1 1/4	1.94	49.4	21.0	3,000	84.0	12,000	18.1	460	2.23	
LH-4SP-24	1 1/2	2.21	56.2	18.5	3,650	74.0	10,800	22.1	560	2.49	
LH-4SP-32	2	2.73	69.4	16.5	2,360	66.0	9,600	26.0	660	3.68	