


Oilfield Workover

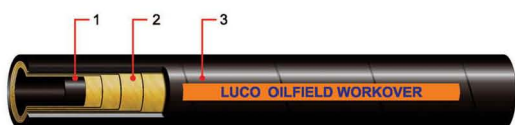

- 1- Synthetic Rubber Tube
- 2- Four High Tensile Steel Wire Spirals
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber

Reinforcement: Four spirals of high tensile wire

Cover: Oil and weather resistant synthetic rubber


Temperature: -40° F / +212° F, Intermittent use up to 250° F

Application: Oilfield workover rigs and well servicing "Not to be used with hydraulic systems"

Key Note: 5000 PSI working pressure with 2.9 to 1 safety factor when used on oilfield workover rigs and well servicing applications

Part Number	Hose I.D.		Hose O.D.		Working Pressure		Burst Pressure		Min. Bend Radius		Weight
	(in)	(in)	(mm)	(MPa)	(psi)	(MPa)	(psi)	(in)	(mm)	(lbs/ft)	
LH-OFW-32	2"	2.68	68	34.5	5,000	100.0	14,500	27.6	700	3.36	

SAE 100R3

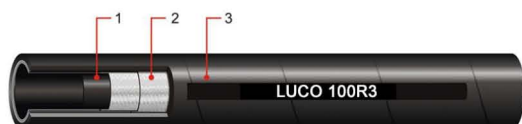

- 1- Synthetic Rubber Tube
- 2- Two High Tensile Textile Fiber Braids
- 3- Synthetic Rubber Cover

Tube: Oil resistant, synthetic rubber

Reinforcement: Two braids of high tensile textile fiber

Cover: Oil and weather resistant synthetic rubber

Temperature: -40° F / +212° F, Intermittent use up to 250° F

Application: Petroleum based hydraulic fluid, gasoline, water, diesel fuels, lubricating oils, glycol, mineral oils, and more

Key Note: For medium pressure hydraulic and pneumatic service

Part Number	Hose I.D.		Hose O.D.		Working Pressure		Burst Pressure		Min. Bend Radius		Weight
	(in)	(in)	(mm)	(MPa)	(psi)	(MPa)	(psi)	(in)	(mm)	(lbs/ft)	
LH-100R3-03	3/16	0.50	12.6	10.5	1,500	42.0	6,000	3.0	75	0.11	
LH-100R3-04	1/4	0.56	14.1	8.7	1,250	34.8	5,000	3.0	75	0.12	
LH-100R3-05	5/16	0.66	16.8	8.4	1,200	33.6	4,800	3.9	100	0.18	
LH-100R3-06	3/8	0.72	18.4	7.8	1,125	31.2	4,500	3.9	100	0.21	
LH-100R3-08	1/2	0.91	23.0	7.0	1,000	28.0	4,000	4.9	125	0.3	
LH-100R3-10	5/8	1.05	26.7	6.1	875	24.4	3,500	5.5	140	0.36	
LH-100R3-12	3/4	1.22	31.0	5.2	750	20.8	3,000	5.9	150	0.48	
LH-100R3-16	1	1.48	37.5	3.9	565	15.6	2,260	8.1	205	0.60	
LH-100R3-20	1 1/4	1.77	45.0	2.6	375	10.4	1,500	9.8	250	0.72	